KNOWLEDGE BASE ARTICLE

Publishing a Preconfigured QR Code on a SharePoint Page



2026 © Vitextra SIA. All rights reserved.

Disclaimer

For the purposes of this Disclaimer:

- **Company** (referred to as either "the Company", "We", "Us" or "Our" in this Disclaimer) refers to Vitextra SIA, LV-1009 Riga, Matise iela 61 - 25.
- **Document** refers to the Knowledgebase Article.
- **You** means the individual accessing the Document, or the company, or other legal entity on behalf of which such individual is accessing or using the Document, as applicable.
- **Website** refers to Vitextra, accessible from https://vitextra.com

Disclaimer

The information contained in the Document is for general information purposes only.

The Company assumes no responsibility for errors or omissions in the contents of the Document.

In no event shall the Company be liable for any special, direct, indirect, consequential, or incidental damages or any damages whatsoever, whether in an action of contract, negligence, or other torts, arising out of or in connection with the use of the contents of the Document. The Company reserves the right to make additions, deletions, or modifications to the contents in the Document at any time without prior notice.

Errors and Omissions Disclaimer

The information given by the Document is for general guidance on matters of interest only. Therefore, errors can occur even if the Company takes every precaution to ensure that the Document's content is current and accurate. Plus, given the changing nature of laws, rules, and regulations, there may be delays, omissions, or inaccuracies in the information contained in the Document.

The Company is not responsible for any errors or omissions, or for the results obtained from the use of this information.

Fair Use Disclaimer

The Company may use copyrighted material that the copyright owner has not explicitly authorized. The Company is making such material available for criticism, comment, news reporting, teaching, scholarship, or research.

The Company believes this constitutes a "fair use" of any such copyrighted material as provided for in section 107 of the United States Copyright law.

If You wish to use copyrighted material from the Document for your own purposes that go beyond fair use, You must obtain permission from the copyright owner.

"Use at Your Own Risk" Disclaimer

All information in the Document is provided "as is", with no guarantee of completeness, accuracy, timeliness or of the results obtained from the use of this information, and without warranty of any kind, express or implied, including, but not limited to warranties of performance, merchantability and fitness for a particular purpose.

The Company will not be liable to You or anyone else for any decision made or action taken in reliance on the information given by the Service or for any consequential, special or similar damages, even if advised of the possibility of such damages.

Contact Us

If you have any questions about this Disclaimer, You can contact Us by email: support@vitextra.com.

Table Of Contents

Introduction 4

What is saved with the page 4

Preparing and publishing the code 4

What the visitors see 5

Changing a published code 6

Reusing the setup 6

Summary 7

Introduction

QR Code Generator is more than a tool for making a code and taking it away. The configuration of the web part is saved with the page, so the page itself can carry a ready QR code: the guest Wi-Fi on the page of a meeting room, the contact card of the help desk, a link to a registration form on the page of an event. This article explains what is saved, how to publish a prepared code and what the visitors of the page can do with it.

What is saved with the page

When the page is edited, every change in the web part is written to its configuration:

- the selected data tab and the values of the fields on **all** tabs, not only on the selected one;
- the design: **Shape**, **Colors** with the gradient, **Corner Square**, **Corner Dots**;
- the logo together with its **Logo size** and **Logo margin**;
- the **Error Correction** level and the **Size** of the downloaded image;
- the title of the web part.


The configuration becomes permanent when the page is saved or published.

Note

Saving the configuration with the page is available starting with version 26.9.1. In earlier versions the web part opened with the default settings every time.

Preparing and publishing the code

1 Open the page and click **Edit**.
2 Add the **QR Code Generator** web part, or use the one that is already on the page.
3 Select the tab and fill in the data. For a guest network, for example, open the **Wi-Fi** tab and enter **Network**, **Password** and **Encryption**.
4 Set up the design in the sections below the tabs and, if needed, upload a logo.
5 Type a heading in the **Web Part Title** placeholder above the generator, so that the visitors understand what the code is for, for example *Guest Wi-Fi — scan to connect*.
6 Scan the preview with a smartphone and make sure that the code works.
7 Click **Republish** (or **Publish** for a new page).

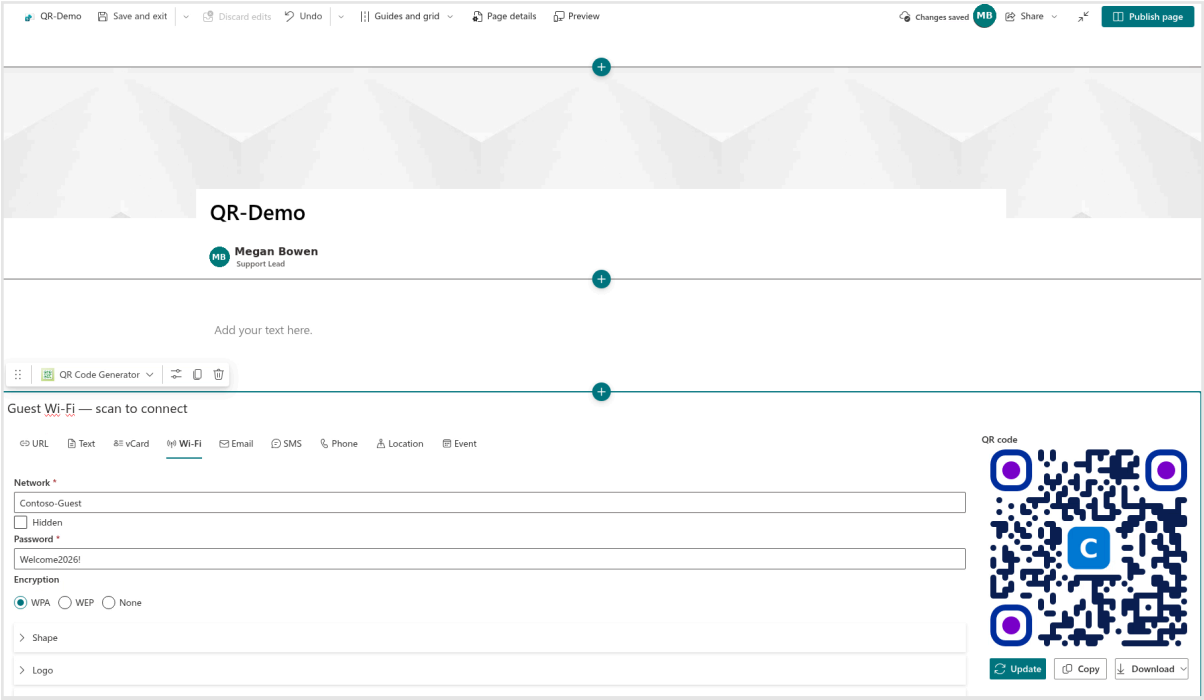

Preparing a guest Wi-Fi code on a page in edit mode

Tip

Before publishing, clear the fields of the tabs that you do not use. Their values are saved with the page too and are shown to anyone who switches to those tabs.


What the visitors see

A visitor who opens the published page sees the web part with the prepared tab selected and the QR code in the preview, ready to be scanned from the screen. No action is needed.

The web part stays a working generator for the visitor as well. The tabs, the fields and the design sections remain available, so a visitor can:

- scan the prepared code, copy it or download it in any format;
- change the data or the design and make a code of their own.

Changes made by a visitor exist only in their browser until the page is reloaded. They are not saved and are not seen by other people; after a reload the web part returns to the published configuration.

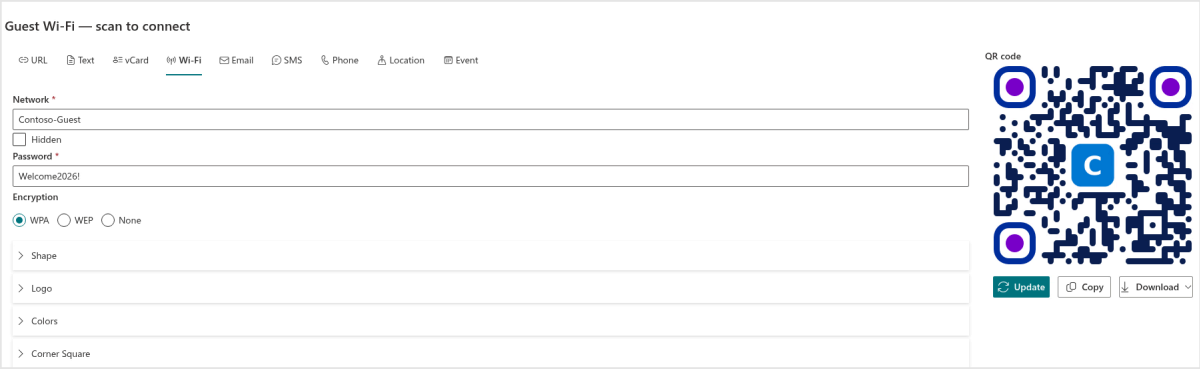

The published page as a visitor sees it

Warning

The web part has no mode that shows the code alone. The fields with the encoded data are always visible next to the code, and the saved configuration is stored in the page as plain text. Anyone who can open the page can read everything that is encoded, including a Wi-Fi password. Publish sensitive data only on pages whose permissions match the audience of the code.

Changing a published code

1 Open the page and click **Edit**.
2 Change the data or the design in the web part.
3 Click **Republish**.

Until the page is republished, the visitors continue to see the previous code. If you leave edit mode without saving, the changes are discarded.

Note

A QR code contains the data itself and not a reference to the web part. Codes that were printed or sent before the change keep the old data. If a password or a link has changed, replace the printed copies.

Reusing the setup

The configuration belongs to the web part instance, which gives several ways to reuse a prepared design:

- **Several codes on one page.** Add the web part several times; each instance keeps its own data and design.
- **A copy of the page.** Use **Copy of this page** in the page command bar. The copy

contains the web part with the same configuration; change only the data.
- **A page template.** Save a page with a styled web part as a template, and every new page created from it starts with the corporate design of the code.

Summary

Everything that is set up in QR Code Generator while the page is edited is saved when the page is published, and the visitors see the prepared code at once. They can still use the generator for themselves, but only an editor of the page changes what is published. Remember that the saved data is readable by everyone who has access to the page.

Tip

The fields of every tab are described in KB10264. QR Code Data Types: URL, Text, vCard, Wi-Fi, Email, SMS, Phone, Location and Event, and the ways to take the code out of the page, in KB10268. Downloading and Copying a QR Code: PNG, JPEG, SVG and WebP.