

KNOWLEDGE BASE ARTICLE

List Filter Online Query Builder: Conditions, Groups and the CAML Query Behind Them



Disclaimer

For the purposes of this Disclaimer:

- **Company** (referred to as either "the Company", "We", "Us" or "Our" in this Disclaimer) refers to Vitextra SIA, LV-1009 Riga, Matīse iela 61 - 25.
- **Document** refers to the Knowledgebase Article.
- **You** means the individual accessing the Document, or the company, or other legal entity on behalf of which such individual is accessing or using the Document, as applicable.
- **Website** refers to Vitextra, accessible from <https://vitextra.com>

Disclaimer

The information contained in the Document is for general information purposes only.

The Company assumes no responsibility for errors or omissions in the contents of the Document.

In no event shall the Company be liable for any special, direct, indirect, consequential, or incidental damages or any damages whatsoever, whether in an action of contract, negligence, or other torts, arising out of or in connection with the use of the contents of the Document. The Company reserves the right to make additions, deletions, or modifications to the contents in the Document at any time without prior notice.

Errors and Omissions Disclaimer

The information given by the Document is for general guidance on matters of interest only. Therefore, errors can occur even if the Company takes every precaution to ensure that the Document's content is current and accurate. Plus, given the changing nature of laws, rules, and regulations, there may be delays, omissions, or inaccuracies in the information contained in the Document.

The Company is not responsible for any errors or omissions, or for the results obtained from the use of this information.

Fair Use Disclaimer

The Company may use copyrighted material that the copyright owner has not explicitly authorized. The Company is making such material available for criticism, comment, news reporting, teaching, scholarship, or research.

The Company believes this constitutes a "fair use" of any such copyrighted material as provided for in section 107 of the United States Copyright law.

If You wish to use copyrighted material from the Document for your own purposes that go beyond fair use, You must obtain permission from the copyright owner.

"Use at Your Own Risk" Disclaimer

All information in the Document is provided "as is", with no guarantee of completeness, accuracy, timeliness or of the results obtained from the use of this information, and without warranty of any kind, express or implied, including, but not limited to warranties of performance, merchantability and fitness for a particular purpose.

The Company will not be liable to You or anyone else for any decision made or action taken in reliance on the information given by the Service or for any consequential, special or similar damages, even if advised of the possibility of such damages.

Contact Us

If you have any questions about this Disclaimer, You can contact Us by email: support@vitextra.com.

Table Of Contents

Overview	4
Where to find the Query Builder	4
Conditions and groups	5
Operators by column type	6
Static and dynamic conditions	8
How the predefined filter combines with user filters	9
From the tree to CAML	9
Viewing the generated query	10
Predefined filters on large lists	11
Limitations	12
Related articles	12

Overview

The **Query Builder** is the part of the Vitextra List Filter Online web part where a page editor defines the **predefined filter** – the set of conditions that every item must satisfy before it appears in the web part. Users cannot see or remove this filter; they only narrow the result further with the filter pane and the column header filters.

The predefined filter is stored as a tree of conditions and groups and is translated into a **CAML query** that SharePoint executes on the server. Nothing is loaded into the browser and filtered afterwards: the list returns only the items that match, page by page, which is what keeps the web part fast on large lists.

Typical uses of the predefined filter:


- Show only the documents **created or modified by the current user**.
- Show only the records of the **last 12 months** on a dashboard page.
- Show only **approved** items, items **with attachments**, or items whose **Status** is not *Closed*.
- Build a page per department from one list without creating a view per department.

Note

The Query Builder defines the filter that is always applied. The controls that users see in the filter pane are configured separately – see [KB10255. Filter Pane Controls and Supported Column Types in List Filter Online](#).

Where to find the Query Builder

- 1 Open the page in edit mode and select **Edit web part** on the List Filter Online web part.
- 2 In the property pane, scroll to the **Filter** group. The label **Filter view by:** is followed by a preview of the current filter – **No filter applied** when nothing is defined yet.
- 3 Select **Edit Filter**. The Query Builder opens in a large side panel.
- 4 Build the query, then select **Save** to apply it or **Cancel** to discard the changes. The web part re-renders immediately with the new filter.

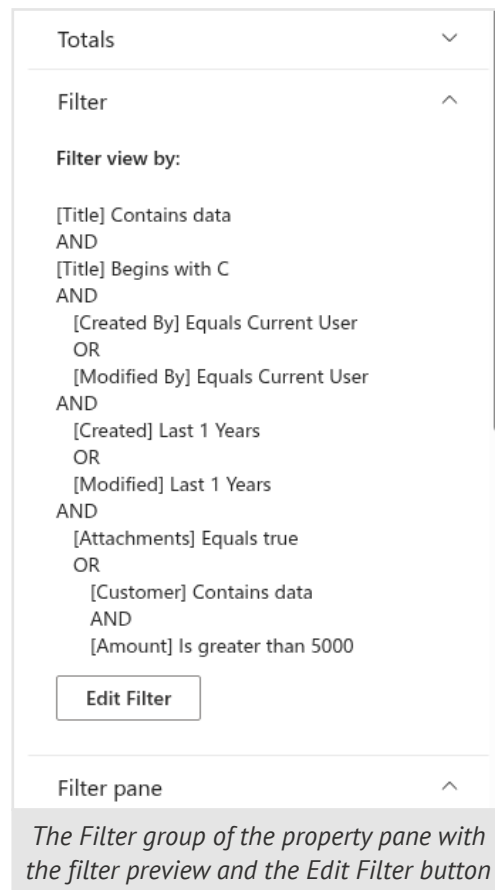

The Query Builder is available only after the **site** and the **list or library** are selected in the **Data source** group, because the list of fields and their types comes from the selected list.

Conditions and groups

A query consists of two kinds of building blocks.


- A **condition** is one comparison: *field – operator – value*, for example **Amount** – *Is greater than* – **5000**. Some operators need no value (*Contains data*, *Is Current User*, *Today*).
- A **group** holds conditions and other groups and joins them with one logical operator – **AND** (every member must be true) or **OR** (at least one member must be true). The toggle on the left edge of the group switches between the two.

The panel always has one **root group**; it cannot be deleted. Inside any group, the **Add** button offers two commands:

- **Condition** – adds an empty row to the current group;
- **Group** – adds a nested group (AND by default) that you fill in the same way.

Groups can be nested up to **ten levels** deep. Every row and every nested group has a

delete icon on the right; deleting a group deletes everything inside it.

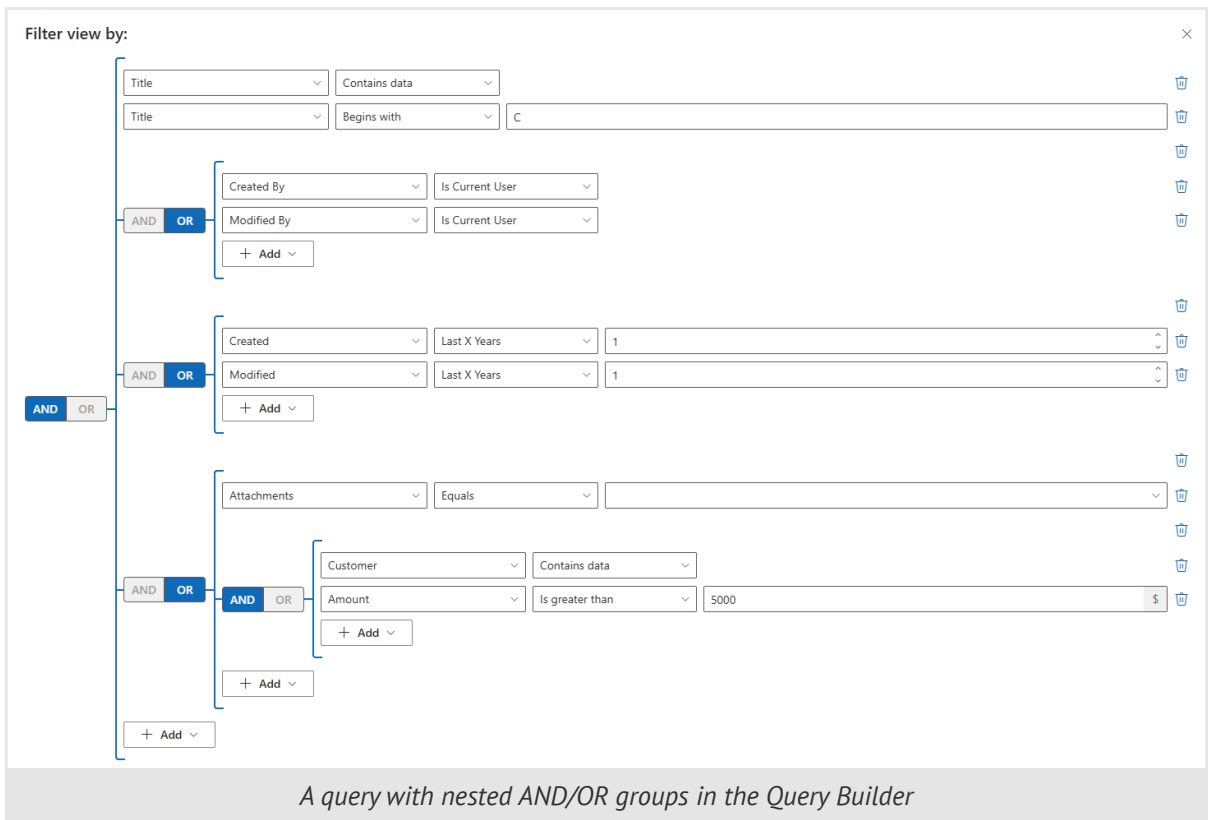

The query in the figure reads: *Title is not empty and begins with "C" and (created by me or modified by me) and (created in the last year or modified in the last year) and (has attachments, or the Customer is filled in and the Amount is greater than 5,000).*

Tip

Keep the root group **AND** and put each alternative set of conditions into its own **OR** group. A query shaped this way is easy to read in the preview and easy to extend later.

Operators by column type

The **operator** list of a row depends on the type of the selected field. The table lists the operators the Query Builder offers for each supported column type.

Column type	Operators
Single line of text, Multiple lines of text, Hyperlink or Picture	Equals, Does not equal, Begins with, Contains, Contains data, Does not contain data

Column type	Operators
Choice	Equals, Does not equal, Begins with, Contains, Contains data, Does not contain data
Choice (multiple values), Lookup, Calculated (text result)	Equals, Does not equal, Contains data, Does not contain data (Calculated also offers Begins with and Contains)
Number, Currency, ID	Equals, Does not equal, Is greater than, Is greater than or equal to, Is less than, Is less than or equal to (Number also offers Contains data, Does not contain data)
Date and Time	On, Not on, On or after, After, On or before, Before, Between, Today, Last X Days, Last X Weeks, Last X Months, Last X Years, Next X Days, Next X Weeks, Next X Months, Next X Years, Contains data, Does not contain data
Yes/No	Equals, Does not equal, Contains data, Does not contain data
Attachments	Equals, Does not equal (value: Yes / No)
Person or Group	Equals, Does not equal, Is Current User, Is not Current User, Contains data, Does not contain data
Managed Metadata (single and multiple values)	Equals, Does not equal, Contains, Does not contain, Contains data, Does not contain data
Approval Status	Equals, Does not equal (value: a list of statuses)
Rating, Likes	Equals, Does not equal, Contains data, Does not contain data (Likes: Contains data, Does not contain data only)

Contains data and *Does not contain data* test whether the column has any value, the

same way **IsNotNull** and **IsNull** do in CAML.

The **value** editor also follows the column type: a date picker for dates (two date pickers for *Between*), a numeric field for numbers and currency, a people picker for **Person or Group**, a term picker for **Managed Metadata**, a *Yes / No* list for Yes/No and Attachments, a list of statuses for **Approval Status**, and a text box for text, choice and lookup columns.

Warning

System and read-only columns (for example *Content Type ID*, *Unique ID*, *Version* or *Checked Out To*) are not offered in the field list. Columns of types that cannot be compared in CAML – such as *Image*, *Location* or *Recurrence* – are not offered either.

Static and dynamic conditions

A **static** condition compares the column with a fixed value you enter: a date, a number, a text, a person. The value is written into the query as is. *Between* covers both dates inclusively, by calendar day; if only one of the two dates is set, the condition becomes an open-ended *On or after* or *On or before*.

A **dynamic** condition is resolved by SharePoint **at the moment the query runs**, so the same page shows different items to different users and on different days:

Operator	How it is resolved
Is Current User / Is not Current User	Compares the person column with the ID of the signed-in user (<UserID /> in CAML).
Today	Compares the date column with the current date (<Today />).
Last X Days / Weeks / Months / Years	A range from <i>today minus X</i> (days, weeks, months or years) to <i>today</i> .
Next X Days / Weeks / Months / Years	A range from <i>today</i> to <i>today plus X</i> .

The number for *Last X* and *Next X* is entered in the value field of the row. **Last X Months** and **Last X Years** are converted to a start date when the query is generated, so a page that says *Modified – Last X Years – 1* always covers the last twelve months

without anyone editing the filter.

Note

Dynamic conditions are evaluated on the server, in the time zone of the site. A document modified late in the evening may therefore fall into a different day than your local clock suggests.

How the predefined filter combines with user filters

When a user applies a filter in the filter pane or in a column header, the web part does not replace the predefined filter. It builds a new query in which the **predefined filter and the user filters are joined with AND**:

```
<Where>
  <And>
    <!-- the predefined filter from the Query Builder -->
    <!-- the conditions selected by the user in the filter
pane -->
  </And>
</Where>
```

Consequences worth knowing:

- Users can narrow the result but never widen it beyond the predefined filter. A page filtered to *Created By – Is Current User* never shows another person's items, whatever the user selects in the pane.
- Sorting, grouping, totals and the Excel export all work on the combined result.
- Saved filters and filter links (see [KB10253. Saving Filters and Sharing a Link to a Filtered View in List Filter Online](#)) store only the user part of the query. The predefined filter is part of the page configuration and travels with the page.

From the tree to CAML

CAML, the query language of SharePoint lists, allows **exactly two operands** inside **<And>** and **<Or>**. A group with three or more members therefore cannot be written as one element; it has to be folded into a chain of nested pairs. The Query Builder does this folding for you, together with the type-specific details: the **Type** attribute of every value, **LookupId** for lookup columns and **IncludeTimeValue** for date

comparisons.

The query from the figure above produces a **<Where>** clause of about 70 lines. Its skeleton – with the comparisons shortened – looks like this:

```
<Where>
  <And>
    <Or>  <!-- created by me OR modified by me -->
      <Eq><FieldRef Name="Author" /><Value
Type="Integer"><UserID /></Value></Eq>
      <Eq><FieldRef Name="Editor" /><Value
Type="Integer"><UserID /></Value></Eq>
    </Or>
    <And>
      <Or>  <!-- created in the last year OR modified in the
last year -->
        <And> <Geq Created 2025-10-21 /> <Leq Created <Today
/> /> </And>
        <And> <Geq Modified 2025-10-21 /> <Leq Modified
<Today /> /> </And>
      </Or>
      <And>
        <Or>  <!-- (customer filled in AND amount > 5000) OR
has attachments -->
          <And> <IsNotNull Customer /> <Gt Amount 5000 /> </
And>
            <Eq Attachments 1 />
          </Or>
          <And> <IsNotNull Title /> <BeginsWith Title "C" />
        </And>
      </And>
    </And>
  </And>
</Where>
```

Each *Last X Years* row became an **<And>** of two date comparisons, each OR group became an **<Or>** element, and the four members of the root AND group became three nested **<And>** elements.

Viewing the generated query

To see the exact CAML that the web part sends – including the predefined filter, the current user filters, the view fields, the row limit and the grouping:

- 1 In the property pane, expand **Developer tools** and switch on **Enable developer mode**.
- 2 Save the page. A developer tools menu appears at the right end of the command bar of the web part.
- 3 Select **CAML Query**. The query opens in a dialog and can be copied.



Tip

Switch developer mode off again when the filter is ready. The menu is visible to everyone who can see the web part.

Predefined filters on large lists

On lists with more than 5,000 items SharePoint executes a query only if the **first** condition that narrows the result uses an **indexed** column. The predefined filter is the first thing that runs, so it decides whether the page opens at all.

- Start the root group with a condition on an indexed column (*Created*, *Modified*, *Author*, *Editor* and *ID* are indexed by default; others can be indexed in the list settings).

- Prefer AND at the root: an OR between two non-indexed columns cannot use any index.
- Dynamic date conditions (*Last X Months, Today*) are good first conditions when the date column is indexed.

The details, the index warning in the filter configurator and the one-click index creation are described in [KB10257. Filtering Large Lists: Indexed Columns and the 5,000-Item Threshold](#).

Limitations

- The Query Builder works with the columns of **one list or library** – the one selected in the data source. Conditions on columns of other lists are not possible.
 - Lookup and choice values are matched by the **text you type**; there is no picker for them in the Query Builder.
 - A nested group that contains no conditions is ignored when the query is generated.
 - The maximum nesting depth is ten levels. In practice two or three levels cover almost every scenario; a deeper tree is hard to read in the preview.
 - The predefined filter is not shown to users. If users need to know why some items are missing, say so in the web part title or on the page.
-

Related articles

Tip

The remaining settings of the property pane are described in [KB10201. Configuring the List Filter Online Web Part](#); the filter pane controls in [KB10255. Filter Pane Controls and Supported Column Types in List Filter Online](#); cascading drop-down options in [KB10256. Cascading Filters: Narrowing Drop-Down Options by Other Selected Filters](#). For a comparison with the built-in List web part, see [KB10321. List Filter Online vs. the Built-in List Web Part: What's the Difference?](#).